

SIVREN API – for myinfo v4

API – login	http://localhost:8000/api/login
Method	POST
API	Public API
Params	email password confirm_password

The screenshot displays the HTTPie application interface. On the left, a sidebar shows a collection named 'sivren_api' with endpoints: GET get_user, POST register, POST login (selected), and POST logout. Below this is a 'Drafts' section. The main panel shows a POST request to 'http://localhost:8000/api/login'. The request body is a multipart form with three fields: 'email' (sundar@sivreninn...), 'password' (Test123), and 'password_c...' (Test123). The response is a 200 OK status with a JSON body containing a long 'token' string. The bottom status bar indicates the response is in JSON format, 1KB in size, and took 511ms to receive.


```
POST http://localhost:8000/api/login

Body
email sundar@sivreninn...
password Test123
password_c... Test123

Request POST Response 200
HTTP/1.1 200 OK (11 headers)
{
  "token": "eyJ0eXAiOiJKV1QiLCJhbGciOiJSUzI1NiJ9.eyJhdWQiOiI5YWF1NzIxOS0wMGVlLTQxZjQyYjA5ZDhiZGMiLCJqdGkiOiIiIiwiaWF0IjE5MDQ0OTMwMDQzMjI0NjY1MDJlNWFFhNDM0YzcyNDQzM2UwZTU0ZjYiZDZjNzNkNmQ0M2RlNmFkZDU0ZWJRjNjF1MWFhYTgyYjY2ZmVjYyIsIm1hdCI6MTcwMTE1NTAxNC4zNzY4ODQsIm51ZiI6MTcwMTE1NTAxNC4zNzY4ODQsImV4cCI6MTcwNjg3OTg3NC4zNjQ0MjE5InN1YiI6IjIiLCJzY29wZXMiOi01tdfQ.qUF-7FtWk-RnPayvZg3FRUxKSewA4WmhkH1rHQxgA2vviwUfehckb00UyZ6kPnRhRG5mvkqnWm87kYtXm7xSAEH7sByUfSgqNLKuHYoESwffNwFwUIARdvdM1hfU8AymKo60-qeN9S2QNCvx14G4Ypa2AGId7D3Yb3MyjE2xHEI5DCRYn3U4yX-TNacgHIEsig9cRjCnUcBnR2mQZUzhv2VRx0_ykMbeQbZayAqkA10a1A4NWVRoRuR7fkfhhih0TK0A-"
```

SIVREN API – for myinfo v4

API – register	http://localhost:8000/api/register
Method	POST
API	Public API
Param	name email password password_confirmation

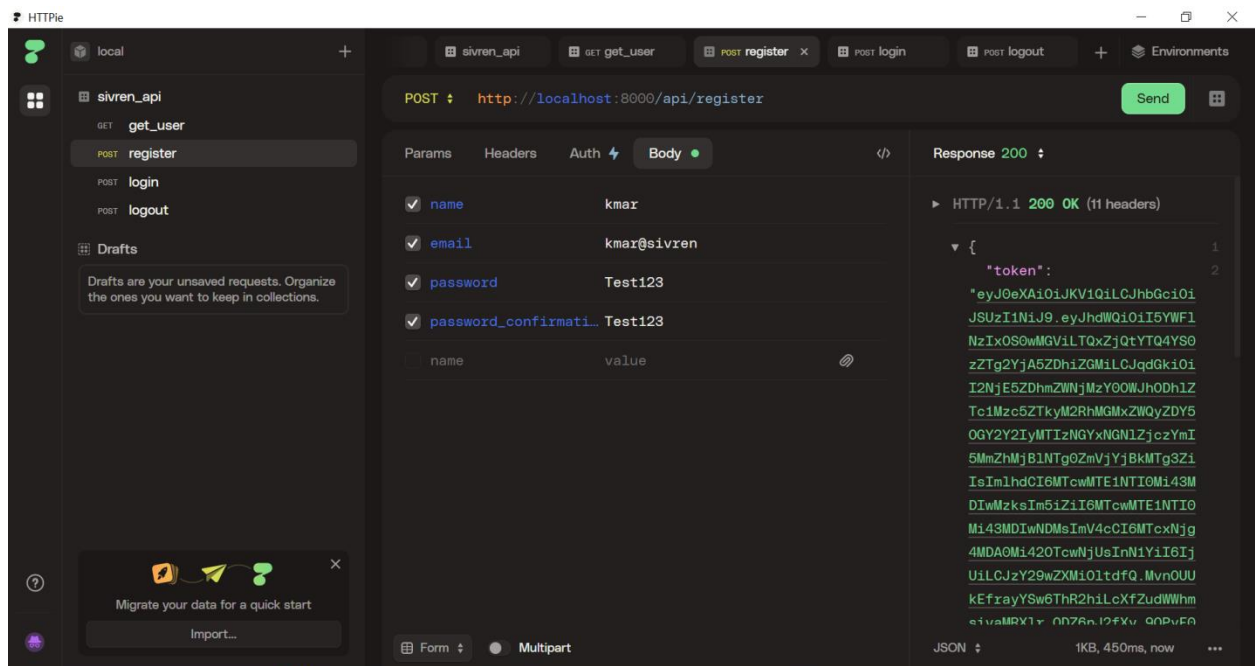

SIVREN API – for myinfo v4

API – logout	http://localhost:8000/api/logout
Method	POST
API	Private API (token required)
Headers	Authorization Bearer <<token>>

The screenshot shows the HTTPie interface with a collection named 'sivren_api'. The 'logout' endpoint is selected, showing a POST request to 'http://localhost:8000/api/logout'. The 'Headers' tab is active, displaying 'Authorization Bearer eyJ0eXAiOiJK...' with a checkmark. The 'Response' tab shows a 200 OK status with a JSON body: {'message': 'You have been successfully logged out!'}. The response is in JSON format, 477B in size, and took 59ms to receive, 3h ago.

The screenshot shows the HTTPie interface with the same 'sivren_api' collection. The 'logout' endpoint is selected, but the 'Authorization' header now contains a different token: 'Authorization Bearer yJ0eXA10iJKV...'. The 'Response' tab shows a 401 Unauthorized status with a JSON body: {'message': 'Unauthenticated.'}. The response is in JSON format, 415B in size, and took 700ms to receive, now.

If token is wrong we get Unauthenticated message

SIVREN API – for myinfo v4

API – user	http://localhost:8000/api/user
Method	GET
API	Private API (token required)
Headers	Authorization Bearer <<token>>
Desc	Get user details (login user)

